

FINAL SETOUT OF TREES WILL DEPEND UPON ACTUAL SERVICE LOCATIONS AND SHALL BE APPROVED AFTER CONSULTATION WITH LANDSCAPE ARCHITECT.

LEGEND

- PROPOSED TREE/ EXISTING TREE TO BE RETAINED
- EXISTING TREE TO BE REMOVED
- PROPOSED EVERGREEN TREE REFER TO DETAIL 7/MD09
- PROPOSED DECIDUOUS TREE REFER TO DETAIL 2/AS/MD09
- PROPOSED SEATING ROCK REFER TO DETAIL 3/MD08
- PROPOSED GROUND COVER/ SHRUB PLANTING REFER TO SPECIFICATION & DETAIL 7/MD09
- IRRIGATED TURF REFER TO SPECIFICATION
- PROPOSED GRAVEL MULCH REFER TO SPECIFICATION
- PROPOSED SCREEN REFER TO DETAIL 4/AS/MD08
- TIMBER PLINTH REFER TO DETAIL 5/MD09
- 70mm PVC IRRIGATION CONDUITS
- PROPOSED BENCH SEAT REFER SPECIFICATION
- EXISTING TAP
- EXISTING GRATED PIT
- EXISTING LIGHT POLE
- EXISTING FIRE HYDRANT

NOTES ADDED	7/03/06	A
COMMENT	DATE	REV

**FOR CONSTRUCTION**  
- REVISED DOCUMENT  
REPLACE EARLIER ISSUE



UNIVERSITY OF SA  
WHYALLA CAMPUS  
NICHOLSON AVENUE  
WHYALLA SA




**WEST COURTYARD PLANTING PLAN**

Scale	Drawn	Checked	Date
1:100	PH	PP	MAR 2006

VERIFY ALL DIMENSIONS ON SITE BEFORE COMMENCING ANY WORK OR MAKING SHOP DRAWINGS  
©SWANBURY PENGLASE ARCHITECTS ACN 006 202 775  
444 GILBERT ST ADELAIDE SA 5000  
P: 08 8362 2222  
F: 08 8362 2223  
Email: mail@swanburypenglase.com  
Web site: www.swanburypenglase.com

**05224 WD07A**

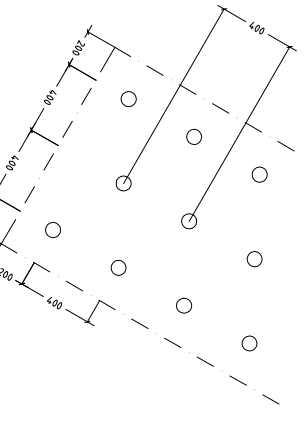

TYPICAL PLANT SETOUT FOR TUSSOCK SPECIES  
SCALE 1:20



PLANT SCHEDULE	BOTANICAL NAME	COMMON NAME	INSTALLATION	QUANTITY
TREES				
AV	Allocasuarina verticillata	300mm cont.	2.5m	21
Es	Eucalyptus scoparia	300mm cont.	2.5m	6
Pc	Pyrus calleryana 'Chanticleer'	30mm calliper	2m	7
TUSSOCKS SPECIES - REFER TO WD2 07 FOR SETOUT				
Dr	<i>Dianella revoluta</i>	Native Flax	140mm cont.	180
Lk	<i>Lomandra Katrinus'</i>	Lomandra Cultivar	140mm cont.	173
Pl	<i>Poa labillardii</i> 'Eskdale'	Poa Cultivar	Tube stock	519
FEATURE PLANTS				
Ybe	<i>Yucca 'Bright Edge'</i>	<i>Yucca cultivar</i>	140mm cont.	27
Ye	<i>Yucca elephantipes</i>	Spathless <i>Yucca</i>	140mm cont.	6
Totals				919

NOTE:  
PLANTING SETOUT  
Final density, species and planting locations of shrubs and groundcovers are to be confirmed by Contractor with the Landscape Architect prior to planting.  
Final locations of tree plantings to be determined by actual service locations and are to be confirmed on site with the Landscape Architect.